Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: Wall Light

Supplier's address: Zhongshan Zhaoliang Lighting Co., Ltd., 7/F, No. 30 Qingji Street, Tiebian Vil-

lage, Henglan Town, Zhongshan City, China

Model identifier: 30905904

Type o	of light	source:
--------	----------	---------


Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type	Connec- tion by wire		
(or other electric interface)	tion by wire		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters					
Parameter		Value	Parameter	Value	
General product parameters:					
Energy consur mode (kWh/10 up to the neare	00 h), rounded	24	Energy efficiency class	Е	
dicating if it refe a sphere (360°)	s flux (φuse), in- ers to the flux in , in a wide cone rrow cone (90º)	2 700 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	6 500	
On-mode pow pressed in W	ver (P _{on}), ex-	24,0	Standby power (P _{sb}), expressed in W and rounded to the sec- ond decimal	0,00	
(P _{net}) for CLS, 6	candby power expressed in W the second dec-	-	Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set	80	
Outer dimen-	Height	340	Spectral power dis-	See image	
sions without	Width	130	tribution in the	in last page	
separate con- trol gear, light-	Depth	165	range 250 nm to 800 nm, at full-load		

ing control parts and non-lighting control parts, if any (millimetre)						
Claim of equivalent power ^(a)		-	If yes, equivalent power (W)	-		
			Chromaticity coordinates (x and y)	0,313 0,337		
Parameters for LED and OLED light sources:						
R9 colour rende	ring index value	1	Survival factor	0,90		
the lumen maintenance factor		0,96				
Parameters for	Parameters for LED and OLED mains light sources:					
displacement fa	ctor (cos φ1)	1,00	Colour consistency in McAdam ellipses	6		
replaces a flu	ED light source norescent light integrated balar wattage.	_(b)	If yes then replace- ment claim (W)	-		
Flicker metric (P	st LM)	1,0	Stroboscopic effect metric (SVM)	0,9		

(a)_{'-'} : not applicable;

(b)_{'-'} : not applicable;

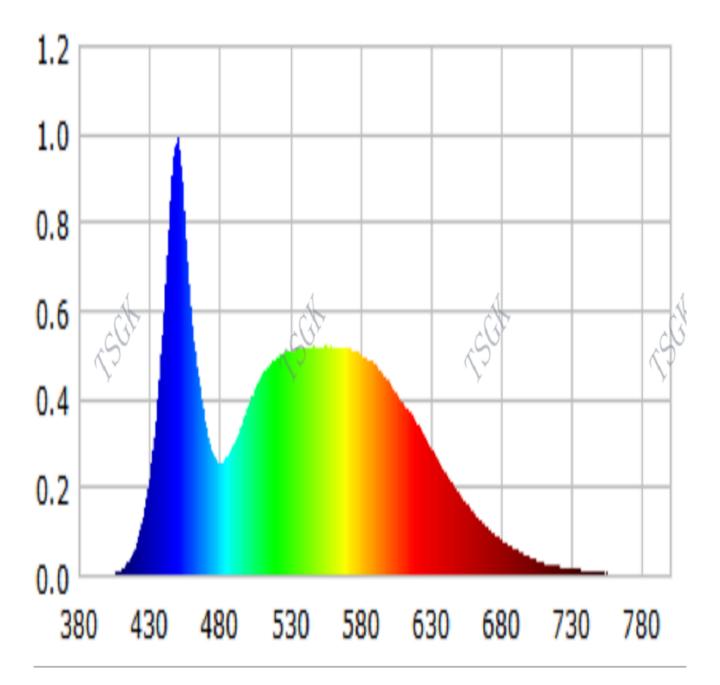

Model placed on the Union market from 01/09/2023



EPREL registration number: 1785384 https://eprel.ec.europa.eu/qr/17

85384

Supplier: StoneX Trading (Authorised representative) Website: https://goecolighting.fr/

Customer care service:

Name: Zhongshan Zhaoliang Lighting Co., Ltd. Website:

Email: goecolightingfr@163.com Phone: +447845991423

Address:

7/F, No. 30 Qingji Street, Tiebian Village, Henglan Town, Zhongshan

City, China